



**INFINITE STRAPS SOLUTIONS**

PRODUCTS & ACCESSORIES



**MATERIALE IMPIEGATO** polipropilene isotattico

**PESO SPECIFICO** 0,91 g/cm<sup>3</sup>

**RESISTENZA** 28 - 32 Kg/mm<sup>2</sup>

**ALLUNGAMENTO** 15 - 25%

**RECUPERO ELASTICO** 90 - 95%

Tolleranza su tutti i dati enunciati  $\pm$  5%

**COLORI** bianco, nero e trasparente

altri colori su richiesta

[per l'esposizione alla luce solare si consiglia

uno speciale prodotto anti-UV]

stampa personalizzata fino a 3 colori su richiesta  
printed strap until 3 colours on request

**USED MATERIAL** isotactic polypropylene

**ABSOLUTE WEIGHT** 0,91 g/cm<sup>3</sup>

**RESISTANCE** 28 - 32 Kg/mm<sup>2</sup>

**ELONGATION** 15 - 25%

**ELASTIC FEEDBACK** 90 - 95%

Tolerance of all the mentioned data  $\pm$  5%

**COLOURS** white, black and transparent

other colours upon request

[for the sunlight exposure we suggest a special

anti-UV product]




# series


## HI-straPP™



High Quality Polypropylene Strap

| DIMENSIONE<br>SIZE<br>mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>A<br>Ø 62 mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>B<br>Ø 392 mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>C<br>Ø 200 mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>D<br>Ø 150 mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>E<br>Ø 280 mm | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>K<br>Ø 406 mm |
|--------------------------|--|---|---|---|---|---|
| 5x0,35                   | 2500   | -   | 7500  | 7500  | -   | -   |
| 5x0,40                   | -  | -   | 7500  | 7500  | -   | -   |
| 5x0,45                   | -  | -   | 7000  | 7000  | -   | -   |
| 5x0,50                   | -  | -   | 6500  | 6500  | -   | -   |
| 6x0,50                   | -  | -   | 6500  | -   | -   | -   |
| 6x0,60                   | -  | -   | 4800  | -   | -   | -   |
| 9x0,50                   | -  | -   | 4500  | -   | 3700  | -   |
| 9x0,60                   | -  | 4000  | 4000  | -   | 3000  | -   |
| 9x0,65                   | -  | 3500  | 3500  | -   | 2800  | -   |
| 9x0,70                   | -  | 3250  | 3250  | -   | -   | 3250  |
| 12x0,52                  | 1500   | 3500  | 3500  | -   | 2800  | 3000  |
| 12x0,58                  | 1250   | 3000  | 3000  | -   | 2500  | 3000  |
| 12x0,65                  | 1100   | 2750  | 2750  | -   | 2200  | 2750  |
| 12x0,68                  | 1000   | 2500  | 2500  | -   | 2000  | 2500  |
| 12x0,70                  | 1000   | 2500  | 2500  | -   | 2000  | 2500  |
| 12x0,75                  | 1000   | 2300  | 2300  | -   | 1800  | 2300  |
| 12x0,80                  | 1000   | 2000  | 2000  | -   | 1600  | 2000  |
| 12x0,85                  | -  | 2000  | 2000  | -   | 1600  | 2000  |
| 15x0,60                  | 1000   | 2000  | 2000  | -   | 1600  | 2000  |
| 15x0,70                  | -  | 1500  | 1500  | -   | -   | 1500  |
| 15x0,75                  | -  | 1500  | 1500  | -   | -   | 1500  |
| 15x0,80                  | 800  | 1500  | 1500  | -   | -   | 1500  |
| 15x0,85                  | -  | 1500  | 1500  | -   | -   | 1500  |
| 15x1,00                  | -  | 1500  | -   | -   | -   | 1500  |
| 19x0,80                  | -  | 1300  | 1300  | -   | -   | 1300  |

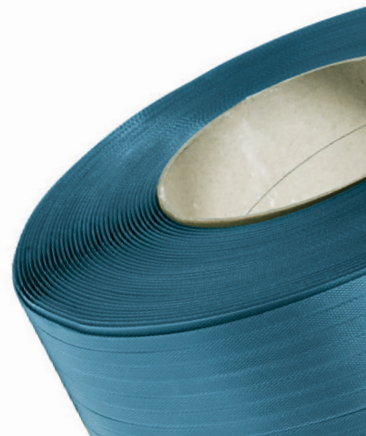

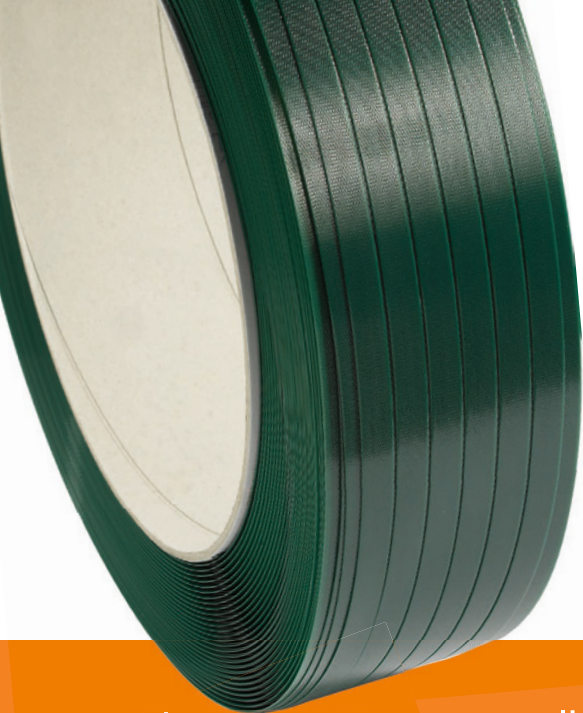

**MATERIALE IMPIEGATO** poliestere (PET)  
**PESO SPECIFICO** 1,38 g/cm<sup>3</sup>  
**CARICO DI ROTTURA** 40 - 50 Kg/mm<sup>2</sup>  
**ALLUNGAMENTO** 10 - 15%  
Tolleranza su tutti i dati enunciati ± 5%  
**COLORI** verde, nero  
**SUPERFICIE** gofrata  
[superficie liscia e prodotto additivato  
con antisplit solo su richiesta]

stampa personalizzata fino a 3 colori su richiesta  
printed strap until 3 colours on request



**USED MATERIAL** polyester (PET)  
**SPECIFY GRAVITY** 1,38 g/cm<sup>3</sup>  
**BREAKING LOAD** 40 - 50 Kg/mm<sup>2</sup>  
**ELONGATION** 10 - 15%  
Tolerance of all the mentioned data ± 5%  
**COLOURS** green, black  
**SURFACE** embossed  
[plain surface and antisplit additive only on request]

# series

## HI-straPET™




High Quality Polyester Strap

| DIMENSIONE<br>SIZE<br>mm | m/ROLL | RESISTENZA<br>RESISTANCE<br>Kg | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>mm |
|--------------------------|--------|--------------------------------|--|
| <b>9x0,60</b>            | 3500   | 200                            | 406  |
| <b>9,5x0,60</b>          | 3000   | 207                            | 406  |
| <b>12,5x0,50</b>         | 2500   | 230                            | 406  |
| <b>12x0,60</b>           | 2500   | 270                            | 406  |
| <b>12x0,65</b>           | 2500   | 280                            | 406  |
| <b>11x0,70</b>           | 2400   | 290                            | 406  |
| <b>12x0,70</b>           | 2000   | 330                            | 406  |
| <b>15x0,60</b>           | 2000   | 330                            | 406  |
| <b>15x0,70</b>           | 1750   | 380                            | 406  |
| <b>15,5x0,60</b>         | 2000   | 345                            | 406  |
| <b>15,5x0,70</b>         | 1750   | 420                            | 406  |
| <b>15,5x0,80</b>         | 1500   | 490                            | 406  |
| <b>15,5x0,90</b>         | 1250   | 590                            | 406  |
| <b>16x0,95</b>           | 1250   | 630                            | 406  |
| <b>16x1,00</b>           | 1200   | 560                            | 406  |
| <b>19x0,70</b>           | 1250   | 600                            | 406  |
| <b>19x0,80</b>           | 1250   | 670                            | 406  |
| <b>19x1,00</b>           | 1000   | 740                            | 406  |
| * <b>19x1,27</b>         | 650    | 1000                           | 406  |
| <b>25x1,00</b>           | 650    | 930                            | 406  |

\* liscia / smooth surface

Jumbo Coil e altre misure, lunghezze su richiesta  
Jumbo Coil and other sizes, lengths on request



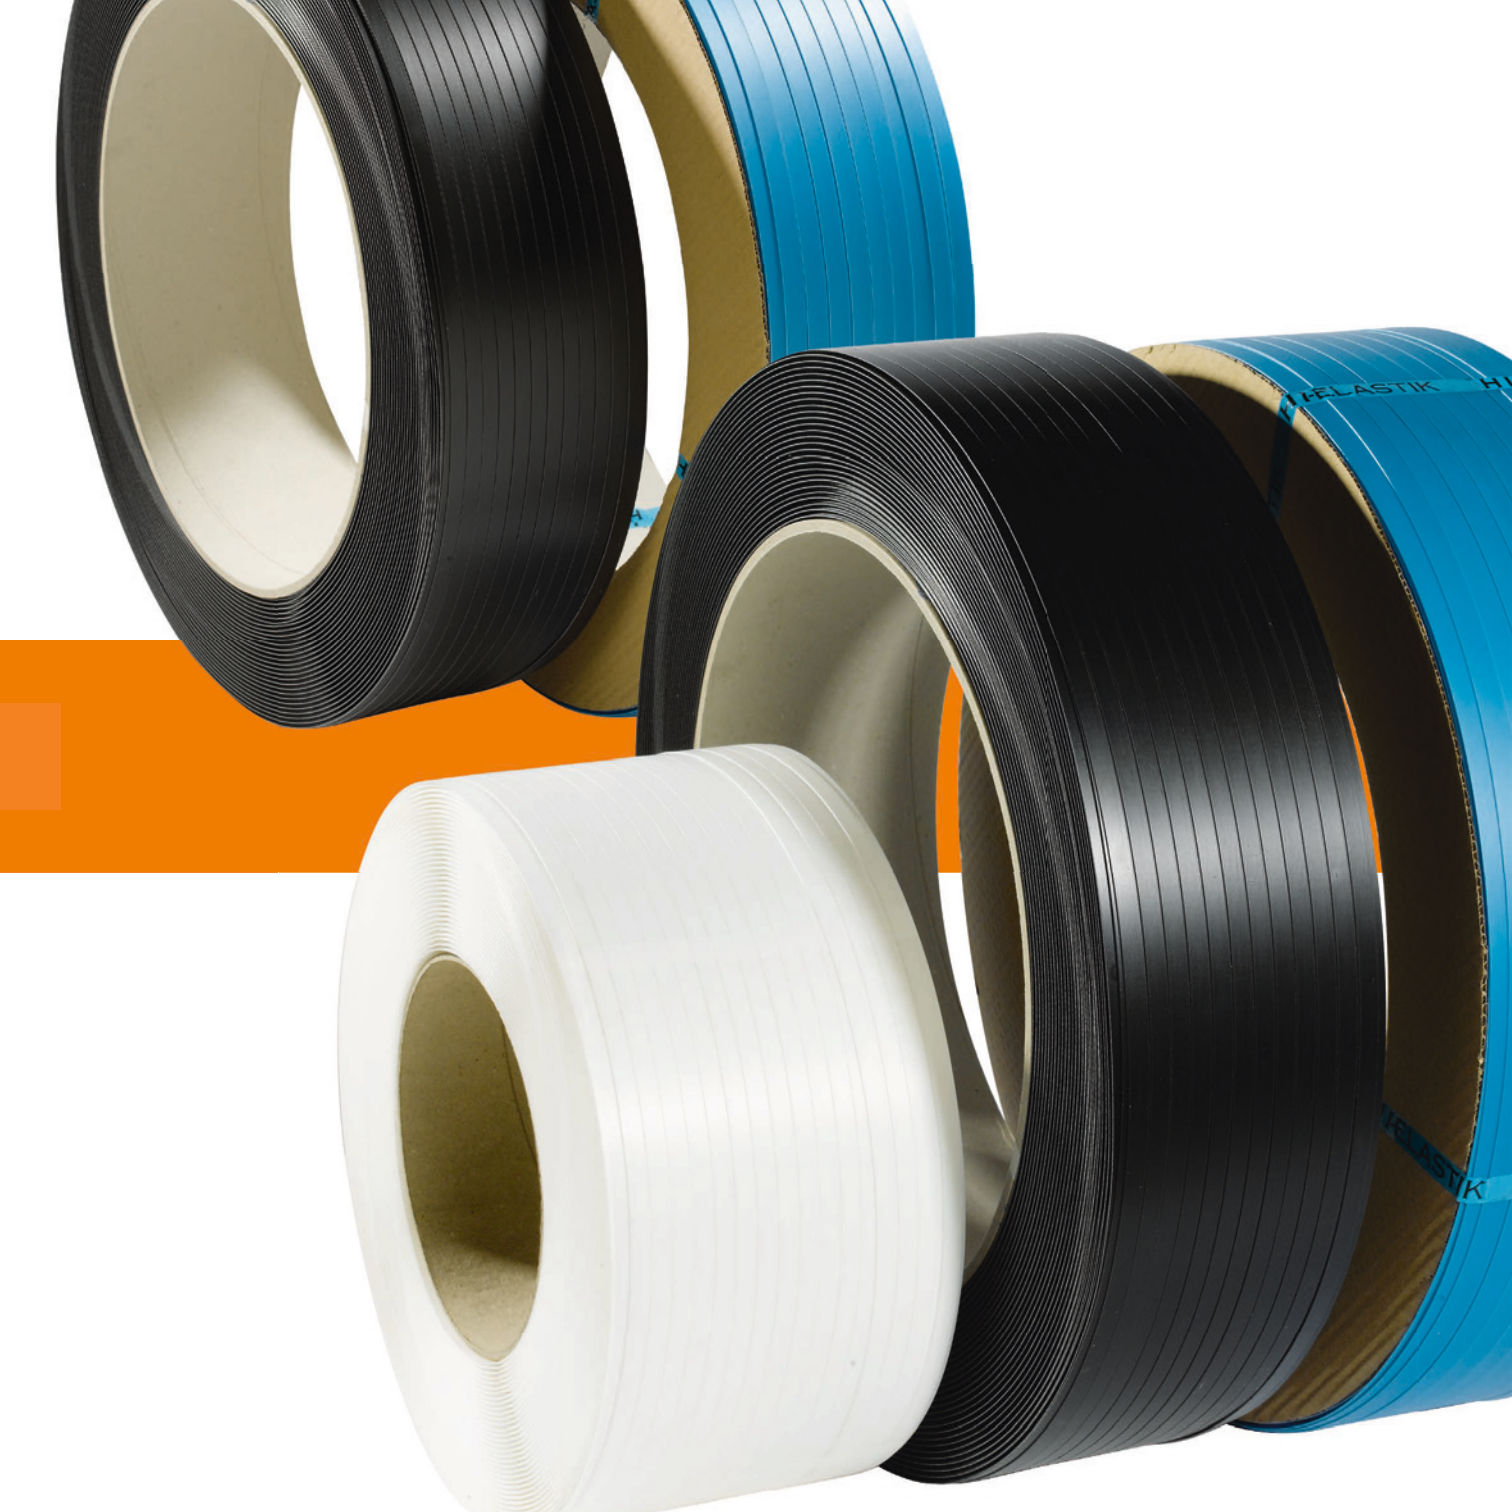

# series

## HI-ELASTIK™



\*Signode Comparable Polypropylene Flat Strap



7

**CODICE  
CODE**

**DIMENSIONE  
SIZE  
mm**

**m/ROLL**

**RESISTENZA  
RESISTANCE  
Kg**

**DIAMETRO  
INTERNO  
INNER  
CORE  
mm**

| CODICE<br>CODE | DIMENSIONE<br>SIZE<br>mm | m/ROLL | RESISTENZA<br>RESISTANCE<br>Kg | DIAMETRO<br>INTERNO<br>INNER<br>CORE<br>mm |
|----------------|--------------------------|--------|--------------------------------|--|
| <b>BP714</b>   | 11,1x0,51                | 3200   | 180                            | 406  |
| <b>BP716</b>   | 11,1x0,63                | 2438   | 225                            | 406  |
| <b>BP718</b>   | 11,1x0,76                | 2134   | 270                            | 406  |
| <b>BP935</b>   | 15,0x0,90                | 1300   | 460                            | 406  |
| <b>S714</b>    | 10,8x0,51                | 2515   | 180                            | 200  |
| <b>S716</b>    | 10,8x0,63                | 2040   | 225                            | 200  |
| <b>S718</b>    | 10,8x0,76                | 1705   | 270                            | 200  |
| <b>S654</b>    | 9,0x0,46                 | 3430   | 135                            | 200  |

**MATERIALE IMPIEGATO** polipropilene isotattico  
**PESO SPECIFICO** 0,91 g/cm<sup>3</sup>  
**RESISTENZA** 28 - 32 Kg/mm<sup>2</sup>  
**ALLUNGAMENTO** 15 - 25%  
**RECUPERO ELASTICO** 90 - 95%  
 Tolleranza su tutti i dati enunciati ± 5%  
**COLORI** bianco, nero e azzurro  
**SUPERFICIE** liscia con speciale trattamento

**USED MATERIAL** isotactic polypropylene  
**ABSOLUTE WEIGHT** 0,91 g/cm<sup>3</sup>  
**RESISTANCE** 28 - 32 Kg/mm<sup>2</sup>  
**ELONGATION** 15 - 25%  
**ELASTIC FEEDBACK** 90 - 95%  
 Tolerance of all the mentioned data ± 5%  
**COLOURS** white, black and light blue  
**SURFACE** smooth with special treatment

\* Signode è un marchio registrato della Carlyle Group L.P. / Signode is a trademark of Carlyle Group L.P.

Reggetta personalizzata su richiesta  
Printed strap on request





# series



## HI-COMPstrap™

Composite Corded Strap



LASH STRAP



|                        | CODICE CODE      | DIMENSIONE SIZE mm | DIAMETRO INTERNO INNER CORE mm | m/ROLL | RESISTENZA SYSTEM STRENGHT Kg +10% | PZ. per BOX PCS. for BOX N. |
|------------------------|------------------|--------------------|--------------------------------|--------|------------------------------------|-----------------------------|
| CORDED strong          | <b>WG-40</b>     | 13                 | <b>76 mm</b>                   | 1.100  | 375                                | 2                           |
|                        | <b>WG-55</b>     | 16                 |                                | 600    | 600                                | 2                           |
|                        | <b>WG-65</b>     | 19                 |                                | 500    | 725                                | 2                           |
|                        | <b>WG-85</b>     | 25                 |                                | 400    | 1250                               | 2                           |
| BALL PRESS             | <b>WG-30 BAL</b> | 9                  | <b>76 mm</b>                   | 250    | 275                                | 8                           |
|                        | <b>WG-40 BAL</b> | 13                 |                                | 250    | 375                                | 8                           |
| COMPOSITE Extra strong | <b>CS-40</b>     | 13                 | <b>200 mm</b>                  | 1.100  | 540                                | 2                           |
|                        | <b>CS-55</b>     | 16                 |                                | 600    | 860                                | 2                           |
|                        | <b>CS-65</b>     | 19                 |                                | 500    | 960                                | 2                           |
|                        | <b>CS-85</b>     | 25                 |                                | 500    | 1360                               | 2                           |
|                        | <b>CS-105</b>    | 32                 |                                | 300    | 2650                               | 2                           |
| LASH STRAP             | <b>LASH 32</b>   | 32                 |                                | 250    | 2300                               | 1                           |
|                        | <b>LASH 40</b>   | 40                 |                                | 200    | 5000                               | 1                           |
| WOVEN STRAP            | <b>WO-55</b>     | 16                 | <b>76 mm</b>                   | 600    | 600                                | 2                           |
|                        | <b>WO-65</b>     | 19                 |                                | 500    | 725                                | 2                           |
|                        | <b>WO-85</b>     | 25                 |                                | 500    | 1000                               | 2                           |

**NEW**

Ulteriori misure disponibili su richiesta / Further sizes available on request



# accessories




**FIBBIE IN PLASTICA**  
PLASTIC BUCKLES



**FIBBIE ONEWAY**  
ONEWAY BUCKLES



**SIGILLI IN FERRO**  
METAL SEALS

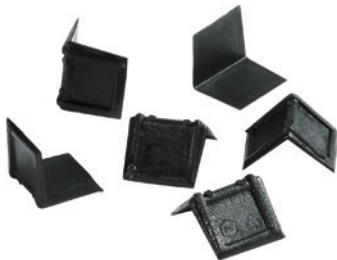

**ANGOLARI**  
PLASTIC CORNERS



**FIBBIE ZINCATE O FOSFATATE**  
GALVANIZED OR PHOSPHATED BUCKLES



XLR



XL



H-22



H-25



H-26

**TENDIREGGIA MANUALI**  
HAND STRAPPING TOOLS

Per offrire il miglior servizio possibile ai nostri clienti  
offriamo una vasta gamma di accessori.

To provide our customers with the best possible  
service we offer a wide range of accessories.



per maggiori informazioni for more info  
[www.baerplast.com](http://www.baerplast.com)



### REGGIATRICI AUTOMATICHE E SEMI-AUTOMATICHE AUTOMATIC AND SEMI-AUTOMATIC STRAPPING MACHINES



D62P



D62



D406F



D200



F1



D400

### CARRELLI DISPENSERS



**WWW.BAERPLAST.COM**

BAER Plast S.n.c.

Via Cantarana, 62 | 36030 Villaverla (VI) Italy

Tel. +39 0445 855186 | Fax. + 0445 855999 | info@baerplast.com

